

EASY MRV Connection Kit



Gestão de Sistemas



Estrutura da Unidade

GESTÃO DE SISTEMAS

Solução Integrada de Sistemas

Conecta o MRV com a gama SUPERMATCH






GESTÃO DE SISTEMAS

Gestão de Sistemas Easy MRV

Haier Easy MRV apresenta soluções para conectar unidades interiores supermatch com condensadores MRV.

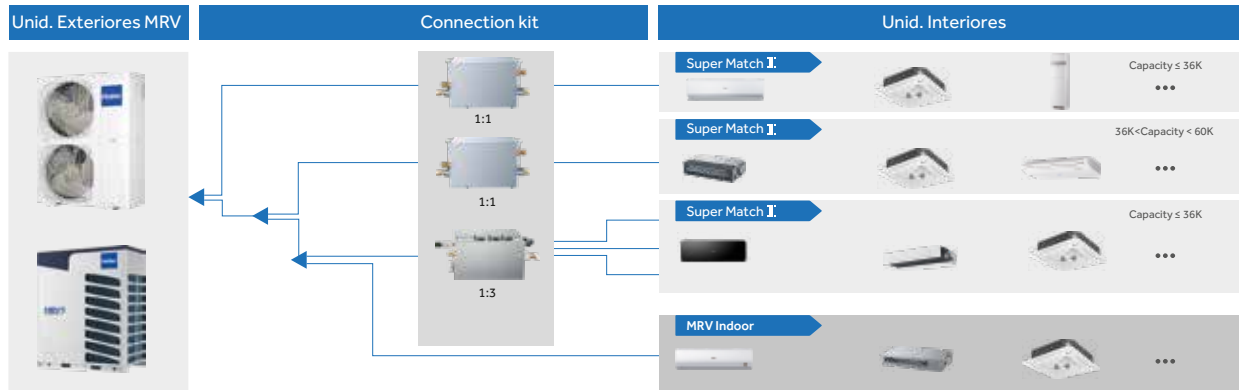

Easy MRV line-up

Kit Easy MRV permite uma solução para conectar os evaporadores supermatch com condensadores MRV.

UE	MRV5	MRV IV	MRV III-C ^{PLUS} MRV III(2-Pipe)	MRV S ^I						MRV S ^I				
HP	8-26	8-24	8 - 16	4	5	4	5	6	8	10	12	3	5	7
Alimentação Eléctrica	3Ph/380-415V/50(60)Hz	3Ph/380-400V/50(60)Hz 3Ph/208-230V/50(60)Hz	3Ph/380-400V/50(60)Hz 3Ph/208-230V/60Hz 3Ph/460V/60Hz	1Ph/220-240V/50(60)Hz		3Ph/380-415V/50(60)Hz 1Ph/220-240V/50(60)Hz			3Ph/380-400V/50(60)Hz			1Ph/220-230V/50(60)Hz		3Ph/380-400V/50(60)Hz 1Ph/220-230V/50(60)Hz

Caixa de Válvula	MS1-036A(1:1)	MS1-060A(1:1)	MS3-036A(1:3)
------------------	---------------	---------------	---------------

Easy MRV evaporadores SUPERMATCH

Easy MRV unidades interiores compatíveis

RAC unidades interiores				
FLEXIS AS25S2SF1FA-WH/BH AS35S2SF1FA-WH/BH AS50S2SF1FA-WH/BH AS71S2SF1FA-WH/BH	EXPERT AS25XCAHRA AS35XCAHRA AS50XCAHRA	JADE AS25S2S1FA-3 AS35S2S1FA-3 AS50S2S1FA-3	PEARL AS25PBAHRA AS35PBAHRA AS50PDAHRA AS68PDAHRA	FLAIR AS20S2SF2FA-3 AS42S2SF2FA-3 AS25S2SF2FA-3 AS50S2SF2FA-3 AS35S2SF2FA-3 AS70S2SF2FA-3
SUPERMATCH unidades interiores				
CASSETTE 600 x 600 AB25S2SC2FA-1 AB35S2SC2FA-1 AB50S2SC2FA-1	CASSETTE ROUND WAY AB71S2SG1FA(H) ABH105H1ERG(H) ABH125H1ERG(H) ABH140H1ERG(H) ABH160H1ERG(H)	CONDUTA SLIM AD25S2S1FA(H) AD35S2S1FA(H) AD50S2S1FA(H) AD71S2S1FA(H)	CONDUTA MÉDIA AD35S2SM3FA(H) AD105S2SM3FA(H) AD50S2SM3FA(H) AD125S2SM3FA(H) AD71S2SM3FA(H) AD140S2SM3FA(H) AD160S2SM3FA(H)	CONDUTA ALTA ADH125H1ERG ADH140H1ERG
CONSOLA DF AF25S2SD1FA (D) AF35S2SD1FA (D) AF42S2SD1FA (D)	CONSOLA CT AC35S2SG1FA(H) AC105S2SH1FA(H) AC50S2SG1FA(H) AC125S2SH1FA(H) AC71S2SG1FA(H) AC140S2SH1FA(H) AC160S2SH1FA(H)	ARMÁRIO AP48KS1ERA(S) AP60KS1ERA(S) AP140S2SK1FA(H)		



EASY MRV

Com
EASY MRV
Connection Kit



MS3-036A(1:3)



FLEXIS WHITE & BLACK Plus

Wi-Fi Standard
hOn - App



Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
AS25S2SF1FA-WH/BH	2.6	3.2	600	1/4" / 3/8"	856/197/300
AS35S2SF1FA-WH/BH	3.5	4.2	650	1/4" / 3/8"	856/197/300
AS50S2SF1FA-WH/BH	5.2	6.0	900	1/4" / 1/2"	999/225/323
AS71S2SF1FA-WH/BH	7.0	8.0	1100	3/8" / 5/8"	1115/235/343



EXPERT Plus

Wi-Fi Standard
hOn - App



Com a Nova Tecnologia
UVC PRO



Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
AS25XCAHRA	2.8	3.2	730	1/4" / 3/8"	895/236/313
AS35XCAHRA	3.5	4.2	800	1/4" / 3/8"	895/236/313
AS50XCAHRA	5.0	5.6	880	1/4" / 1/2"	895/236/313



PEARL Plus

Wi-Fi Standard
hOn - App



Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
AS25PBAHRA	2.6	2.8	550	1/4" / 3/8"	805x200x290
AS35PBAHRA	3.5	3.5	600	1/4" / 3/8"	805x200x290
AS50PDAHRA	5.0	5.2	900	1/4" / 1/2"	975x220x320
AS68PDAHRA	6.8	6.8	1100	1/4" / 1/2"	975x220x320



FLAIR Plus

Wi-Fi Standard
hOn - App



Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
AS20S2SF2FA-3	2.0	2.5	600	1/4" / 3/8"	870x196x301
AS25S2SF2FA-3	2.6	3.2	600	1/4" / 3/8"	870x196x301
AS35S2SF2FA-3	3.5	4.2	650	1/4" / 3/8"	870x196x301
AS42S2SF2FA-3	4.2	4.4	750	1/4" / 3/8"	870x196x301
AS50S2SF2FA-3	5.2	6.0	900	1/4" / 1/2"	1009x223x327
AS71S2SF2FA-3	7.0	8.0	1100	3/8" / 5/8"	1126x230x337



CASSETE 4 VIAS

Wi-Fi Opcional
e APP Smart Air 2



Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
AB25S2SC2FA / -1	2.6	3.2	620-350	1/4" / 3/8"	570x570x260
AB35S2SC2FA / -1	3.5	4.0	620-350	1/4" / 3/8"	570x570x260
AB50S2SC2FA / -1	5.0	5.5	700-500	1/4" / 1/2"	570x570x260

Painel Incluído: PB-620KB



CASSETE ROUND WAY

Wi-Fi Opcional
e APP Smart Air 2



Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
AB71S2SG1FA(H)	7.1	8.0	1260-680	3/8" / 5/8"	840x840x204
ABH105H1ERG(H)	9.2	10.1	1680-1190	3/8" / 5/8"	840x840x246
ABH125H1ERG(H)	12.3	12.7	1950-1200	3/8" / 5/8"	840x840x288
ABH140H1ERG(H)	13.4	15.0	1950-1200	3/8" / 5/8"	840x840x288
ABH160H1ERG(H)	15.0	16.0	2050-1220	3/8" / 3/4"	840x840x288

Painel Incluído: PB-950KB

EASY MRV

Com
EASY MRV
Connection Kit



MS3-036A(1:3)



CONDUTA SLIM BAIXA PRESSÃO 0-30Pa

Wi-Fi Standard
hOn - App

Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
AD25S2SS1FA(H)*	2.5	3.0	530-390	1/4" / 3/8"	892x420x185
AD35S2SS1FA(H)*	3.5	4.0	600-420	1/4" / 3/8"	892x420x185
AD50S2SS1FA(H)**	5.0	5.5	900-450	1/4" / 1/2"	1212x420x185
AD71S2SS1FA(H)**	7.1	7.5	1000-650	3/8" / 5/8"	1212x420x185

Grelha OPCIONAL: *P1B-890IA/D|**P1B-1210IA/D



CONDUTA MÉDIA PRESSÃO 25-150Pa

Wi-Fi Standard
hOn - App

Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
AD35S2SM3FA(H)	3.5	4.0	840-450	1/4" / 3/8"	700x700x248
AD50S2SM3FA(H)	5.0	6.0	1020-550	1/4" / 1/2"	1100x700x248
AD71S2SM3FA(H)	7.1	8.0	1440-900	3/8" / 5/8"	1100x700x248
AD105S2SM3FA(H)	9.5	10.2	1600-1240	3/8" / 5/8"	1500X700X248
AD125S2SM3FA(H)	12.3	12.7	2250-1500	3/8" / 5/8"	1500X700X248
AD140S2SM3FA(H)	13.4	15.0	2500-1500	3/8" / 5/8"	1500X700X248
AD160S2SM3FA(H)	16.0	17.0	2500-1500	3/8" / 3/4"	1500X700X248



CONDUTA ALTA PRESSÃO 37-210Pa

Wi-Fi Opcional
e APP Smart Air 2

Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
ADH125H1ERG	12.3	12.7	3250-1750	3/8" / 5/8"	1350X490X425
ADH140H1ERG	13.4	15.0	2500-1500	3/8" / 5/8"	1350X490X425



CONSOLA DE CHÃO (DUPLO FLUXO)

Wi-Fi Standard
hOn - App

Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
AF25S2SD1FA(D)	2.5	3.0	450	1/4" / 3/8"	700x210x600
AF35S2SD1FA(D)	3.4	3.5	500	1/4" / 3/8"	700x210x600
AF42S2SD1FA(D)	4.2	4.7	580	1/4" / 3/8"	700x210x600



CONSOLA CHÃO-TECTO

Wi-Fi Standard
hOn - App

Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
AC35S2SG1FA(H)	3.5	4.0	750-400	1/4" / 3/8"	1000x230x680
AC50S2SG1FA(H)	5.0	5.8	880-500	1/4" / 1/2"	1000x230x680
AC71S2SG1FA(H)	7.1	7.5	1250-840	3/8" / 5/8"	1325x230x680
AC105S2SH1FA(H)	9.5	10.2	1600-1160	3/8" / 5/8"	1325X230X680
AC125S2SH1FA(H)	12.3	12.7	2050-1400	3/8" / 5/8"	1650X230X680
AC140S2SH1FA(H)	13.4	15.0	2150-1600	3/8" / 5/8"	1650X230X680
AC160S2SH1FA(H)	16.0	17.0	2250-1650	3/8" / 5/8"	1650X230X680



ARMÁRIO

Esterilização UVC

Modelo	Cap. de Arref. [kW]	Cap. de Aquec. [kW]	Caudal de Insuflação [m3/h]	Tub. Liq/Gás [pol]	Dimensões UI [mm]
AP140S2SK1FA(H)	13.4	15.0	1850-1350	3/8" / 5/8"	600X350X1850