

EXPERT


Haier

2,8 kW

3,5 kW

5,0 kW

7,1 kW

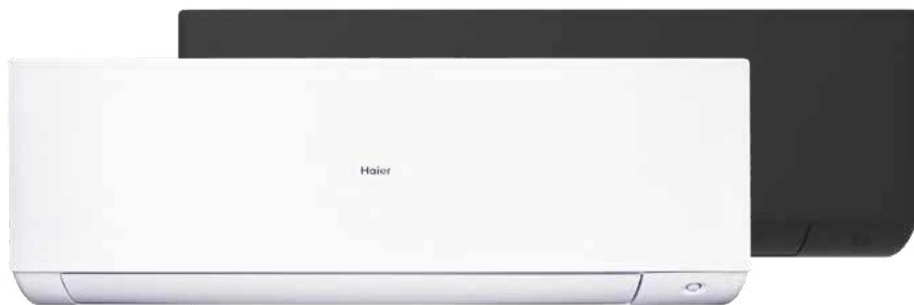


Standard HR-HJ



Fácil Instalação



I Feel



Self Clean




EcoSensor



Wi-Fi



Fácil de Desmontar



Tubagem 2 vias



UVC Pro

Unidade Interior	Modelo	AS20XCAHRA		AS25XCAHRA		AS35XCAHRA		AS50XCAHRA		AS71XCAHRA	
Performance											
Capacidade - Arrefecimento	nom (min-máx)	kW	2,00	2,80 (0,80-3,20)	3,50 (1,00-4,00)	5,00 (1,40-5,50)	6,2(2,20-7,0)				
Capacidade - Aquecimento	nom (min-máx)	kW	2,50	3,20 (0,80-4,20)	4,20 (1,00-5,20)	5,60 (1,70-6,20)	6,8(2,40-7,80)				
Alimentação Eléctrica		Ph/V/Hz	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50				
Cabo de Interconexão			4 x 1,0	4 x 1,0	4 x 1,0	4 x 1,0	4 x 1,0				
Caudal de Insuflação	H	m3/h	730	730	800	880	920				
Unidade Interior											
Nível Potência Sonora (A) - Arref.		dB	56	56	57	60	65				
Nível Potência Sonora (A) - Aquec.		dB	56	56	57	60	65				
Nível de Pressão Sonora - Arref.		dB(A)	39/32/25/16	39/32/25/16	40/33/26/17	45/37/29/20	47/45/37/29				
Nível de Pressão Sonora - Aquec.		dB(A)	39/32/25/16	39/32/25/16	40/33/26/17	45/37/29/20	47/45/37/29				
Dimensões	L x P x A	mm	895x313x236	895x313x236	895x313x236	895x313x236	895x236x313				
Dimensões Embalagem	L x P x A	mm	964x386x316	964x386x316	964x386x316	964x386x316	949x298x371				
Peso Líquido/ Bruto		kg	11,3/14,0	11,3/14,0	11,3/14,0	11,6/14,2	12,4/14,8				
Instalação											
Tubagem Líquido	Ø	mm	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	9,52 (3/8)				
Tubagem Gás	Ø	mm	9,52 (3/8)	9,52 (3/8)	9,52 (3/8)	12,70 (1/2)	15,88 (5/8)				
Controlador											
Standard	Remoto		HQ-HJ	HQ-HJ	HQ-HJ	HQ-HJ	HQ-HJ				

AS20 - AS25 - AS35 - AS50 - AS71

